

# Accurate & Reliable Humidity Monitoring

WP WP•LS

**WessexPower**  
Solutions for High-tech Instrumentation  
[www.wessexpower.co.uk](http://www.wessexpower.co.uk)

**LSTechnology**  
E-commerce Instrumentation  
[www.loggershop.co.uk](http://www.loggershop.co.uk)

Telephone +44(0)1929 459 459

Email [sales@WPLS.co.uk](mailto:sales@WPLS.co.uk)




# LogTag

<sup>®</sup>

## HAXO-16U

Humidity & Temperature  
USB Recorder

# HAXO-16U

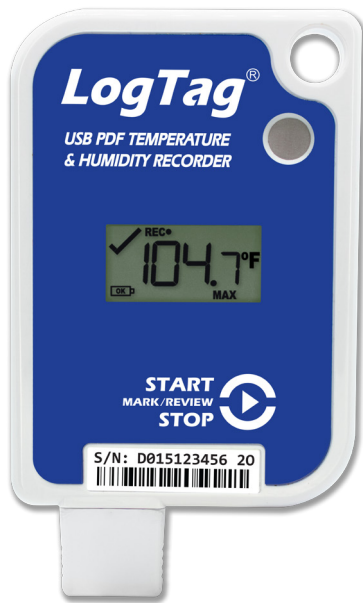

- Software-free PDF and CSV reports
- Built-in USB connection
- Temperature and humidity sensors
- Easy-to-use, single button operation
- Record and store up to 365 days of data
- LCD display for at a glance monitoring
- Industry leading report download speed
- Single and multi-use options available

The HAXO-16U is engineered to accurately and reliably monitor temperature and humidity conditions, protecting goods such as healthcare/pharmaceutical products, livestock, food, flowers, and powders during transportation and storage.

Say goodbye to cradles and slow data downloads! The HAXO-16U features a built-in USB connection for fast report downloads direct to your PC, allowing users to easily retrieve and analyze data without any additional software.

The HAXO-16U features a rugged polycarbonate case so your data is protected even at -30 °C. The HAXO-16U can withstand the rigors of cold chain shipping, providing proven reliability in challenging environments and ensuring you can always retrieve your data.

Enjoy peace of mind with continuous monitoring for up to a full year (365 days - 32,000 readings) and is fully configurable to your desired parameters with LogTag's free software, LogTag Analyzer. This makes it a cost-effective choice for businesses looking to monitor sensitive shipments without additional expenses or complicated training.



# Features

# HAXO-16U



## Software-free Reports:

HAXO-16U now features a built-in USB for fast data retrieval, no software required.



## Temperature and Humidity:

With dual sensors for precise temperature and humidity monitoring.



## At A Glance Monitoring:

With the new easy to read LCD display, checking on your data is as easy as a single glance.



## Single Button Operation:

Enjoy the simple single button operation, making quick data marking and reviewing a breeze.



## Up To 365 Days of Data:

Rest assured, the HAXO-16U can last the longest trip with up to 32,000 readings. That's up to 365 days worth of data!



## Single and Multi-use options:

The HAXO-16U is available in both single-use and multi-use options.

# Specifications

<b>Product Model</b>	HAXO-16U (single-use and multi-use options available)
<b>Sensor Measurement Range</b>	-30 °C to +70 °C (-22 °F to +158 °F)
<b>Operating Temperature Range</b>	-30 °C to +70 °C (-22 °F to +158 °F)
<b>Storage Temperature Range</b>	0 °C to +40 °C (+32 °F to +104 °F)
<b>Humidity Measurement Range</b>	0 %RH to 100 %RH (non-condensing), with limitations
<b>Humidity Operating Range</b>	0 %RH to 100 %RH (non-condensing), with limitations
<b>Humidity Storage Range</b>	20 %RH to 60 %RH*
<b>Rated Temperature Reading Accuracy</b>	Better than $\pm 0.45$ °C ( $\pm 0.8$ °F) for +0 °C to +50 °C (+32 °F to +122 °F), typically $\pm 0.3$ °C ( $\pm 0.6$ °F) Better than $\pm 0.8$ °C ( $\pm 1.4$ °F) for +50 °C to +70 °C (+122 °F to +158 °F), typically $\pm 0.5$ °C ( $\pm 0.9$ °F) Better than $\pm 0.95$ °C ( $\pm 1.7$ °F) for -30 °C to +0 °C (-22 °F to +32 °F), typically $\pm 0.6$ °C ( $\pm 1.1$ °F) Actual performance is typically much better than the rated values. Accuracy figures can be improved by recalibration
<b>Rated Humidity Reading Accuracy</b>	Better than $\pm 3$ %RH for 20 %RH to 80 %RH, typically $\pm 2$ %RH Better than $\pm 5$ %RH for 0 %RH to 20 %RH, typically $\pm 4$ %RH Better than $\pm 5$ %RH for 80 %RH to 100 %RH, typically $\pm 4$ %RH Actual performance is typically much better than the rated values. Accuracy figures can be improved by recalibration
<b>Humidity Resolution</b>	Better than 0.1 %RH
<b>Temperature Resolution</b>	Better than 0.1 °C or 0.1 °F
<b>Recording Capacity</b>	32,000 logs, up to 365 days @ 16 min logging
<b>Sampling Interval</b>	Configurable from 30 seconds to 18 hours
<b>Logging Start Options</b>	Push button start or date and time start
<b>Environmental</b>	IP61 with USB cap fitted
<b>Power Source</b>	CR2450 3V Li-MnO2 UN38.3 Approved coin cell, non-rechargeable, non-replaceable
<b>Battery Life</b>	1 year storage, 1 year of normal use (based on 16 minute logging)
<b>Connection Interface</b>	Built-in USB 2.0
<b>Size</b>	107 mm (H) x 54.5 mm (W) x 8.6 mm (T) including USB cap
<b>Weight</b>	46.8g
<b>Case Material</b>	Polycarbonate

## Transportation



The HAXO-16U ensures accurate and reliable temperature and humidity monitoring, providing confidence that your goods have been stored and transported under the right environmental conditions.

- Temperature and humidity recordings
- Rugged polycarbonate case
- Fast PDF reports with USB connection
- Large memory capacity, up to 365 days
- Long 1-year battery life


## Storage Facilities



Ensure that your storage conditions have remained within the set temperature and humidity parameters with the HAXO-16U, even over long-term storage periods.

- 21 CFR Part 11 compliant software
- User-friendly interface for easy setup
- Simple data export and cloud integration
- Wide temperature monitoring range
- Meets industry regulatory standards

## LogTag® Analyzer

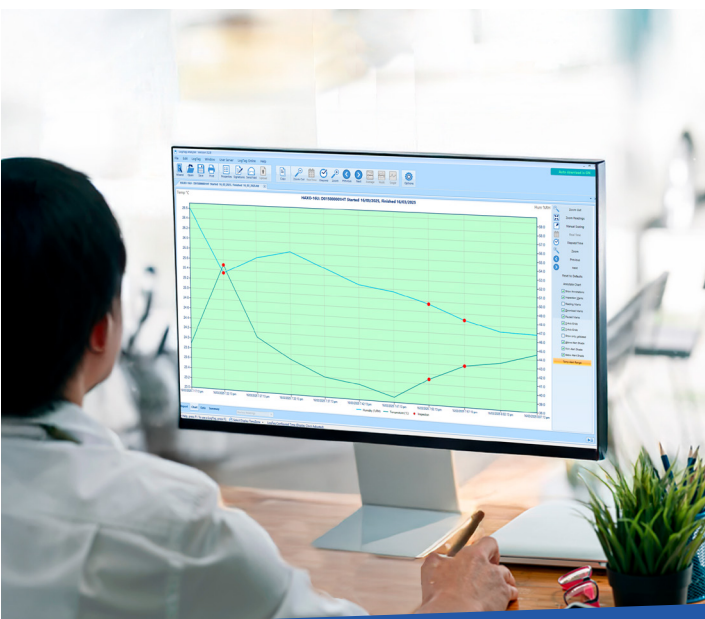

This powerful and free to use 21 CFR Part 11 compliant software transforms how you manage and analyze data from LogTag® data loggers. With features like bulk configuration and advanced multi-graph reports, it delivers everything you need to ensure data integrity and streamline your operations.

Perfect for industries like cold chain and healthcare, it integrates seamlessly with LogTag® Online for cloud storage making this an unbeatable tool that's completely free!